




**Dynaflex**<sup>®</sup>  
Sports Surfacing

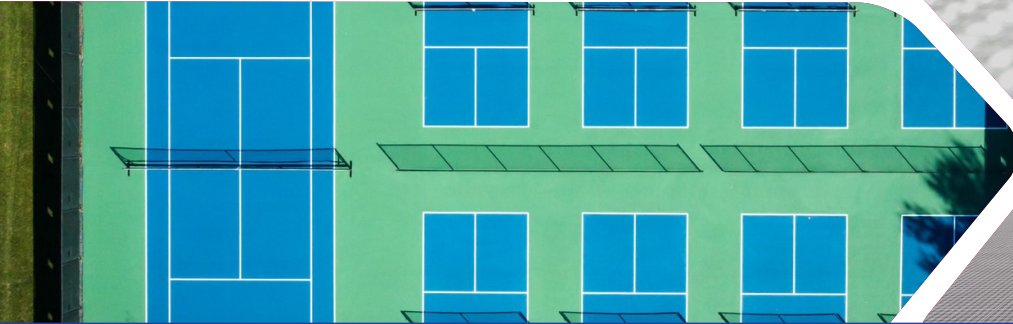

# GRIZZLY COURT - Installation Guide

## REVOLUTIONARY PATENT TECHNOLOGY FREE FLOATING MAT SYSTEM

Grizzly Court is a revolutionary free-floating mat system designed to restore and enhance tennis, pickleball, basketball, and multi-sport courts. Engineered with patented technology, Grizzly Court provides unmatched durability and resilience while preserving optimal ball bounce and playability.

Grizzly Court doesn't require any special equipment for installation making it an easy choice for contractors and players.

Designed as a permanent crack repair solution, Grizzly Court is thermally stable and not susceptible to vapor transmission.

The Grizzly Court contours to substrate eliminating dead spots and has a unique cast in place cushion application that helps with force reduction to allow for longer comfortable play.

Grizzly Court can be installed at any temperature suitable for coatings and is a great solution for roof top and concrete deck applications for both outdoors and interior courts.

Transform your sport surfaces with the newest

innovative, high-performance solution for cracked surfaces that delivers superior resilience without compromising playability.

**Grizzly Court – Stronger. Smoother. Smarter.**

## PRODUCT HIGHLIGHTS

### Cracked Court Solution & Performance Boost

- ▶ Effective solution for covering cracked court surfaces creating a consistent and durable playing experience.

### All-Weather & Thermally Stable Installation

- ▶ Unlike competitors, Grizzly Court can be installed at any temperature suitable for coatings, eliminating delays due to weather constraints.

### No Dead Spots

- ▶ Conforms seamlessly to existing surfaces, ensuring uniform play without unpredictable ball behavior.

### No Special Equipment Needed

- ▶ With no special equipment required, Grizzly Court is a cost-effective and efficient solution for both asphalt and concrete courts.

### Vapor-Resistant & Long-Lasting

- ▶ Not susceptible to vapor transmission, ensuring a durable, low-maintenance, and long-lasting playing surface.



**Dynaflex**<sup>®</sup>  
Sports Surfacing



# GRIZZLY COURT - Installation Guide

## INSTALLATION PROCEDURES

**PREPARATION:** Prior to installing the Grizzly Court, all low areas and cracks must be cleaned and filled evenly with the substrate surface. The mat does contour to the existing surface. It is recommended that all repairs are shadowed and buffed for a smooth transition.

1. All cracks and low areas, such as birdbaths, should be filled to the top, buffed smooth, and shadowed as needed for a flawless transition.
2. Once the site is prepared, mark off six inches from the fence. It is recommended to snap a chalk line for a straight start for unrolling the Grizzly Mat.
3. Unroll the first mat all the way to the end, and cut off any excess.
4. Continue installing the remaining rolls of Grizzly Mat leaving a 1/8" - 1/4" gap between the mats.
5. Once all the mats have been laid out, install the seaming tape between each mat evenly. At this time, also install the Grizzly Glue on the edge of the mat using a 1/8" trowel.

*NOTE: On the lower side of the court, gap the Grizzly Glue 6' between beads this allows the substrate to breath.*

6. Once the caulking and seaming tape installation are complete, install the Yellow Jacket Fiberglass (18") over the seams. Using the Grizzly Binder and the slotted squeegee 3/8" notch, overlay and secure the seams.
7. Once the seams have been secured, using a 3/8" notched squeegee, install the Grizzly Binder over the entire surface of the Grizzly Mat and allow it to dry for a full day.
8. Install two applications of DynaCushion Base Mat over the entire court with a straight blade squeegee. The first application should be installed with a 3/8" notched squeegee and follow the seams. All other applications will be perpendicular to the previous application (cris/cross).



**Dynaflex**<sup>®</sup>  
Sports Surfacing



# GRIZZLY COURT - Installation Guide

## INSTALLATION PROCEDURES

9. Install two applications of the DynaCushion Top Mat in the same manner as the DynaCushion Base Mat.
10. Install two applications of Dynaflex Acrylic Resurfacer over the entire surface in the same directions as the baselines of the court. At this time, if necessary, buff the surface for a smooth finish.
11. Install two applications of Dynaflex Dynacolor, Center Court or PicklePlay color coating over the new mat surface (2-3 applications is recommended).
12. Survey and install playing lines.
13. Install masking tape. Apply two applications of Stripe Aid Gap Filler.
14. Allow to dry, and then install two applications of DynaStripe Line Paint.
15. Allow to dry, and then remove tape.
16. Raise the net and prepare for play.

**Always allow 48-72 hours of cure time before play.**